



CONTRACT SEATING FABRICS

MCE offers our customers discounted pricing on a variety of fabric patterns and colors. We take pride in constructing your seating product and hand-covering it with the fabric of your choice.

Scroll down below to view our fabric cards.

Note: Featured fabrics are provided as a general guide and do not guarantee exact duplication of colors, textures or designs. To ensure the fabric selection meets your expectations, please request a sample from your Account Representative.







CONTRACT UPHOLSTERY FABRICS

Origin, Ego, Nestle

ORIGIN

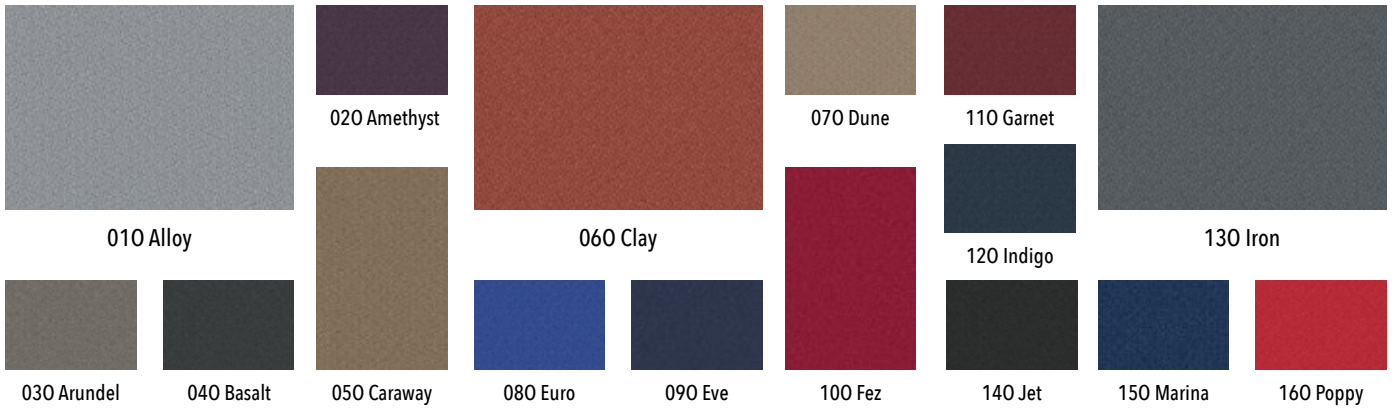

EGO

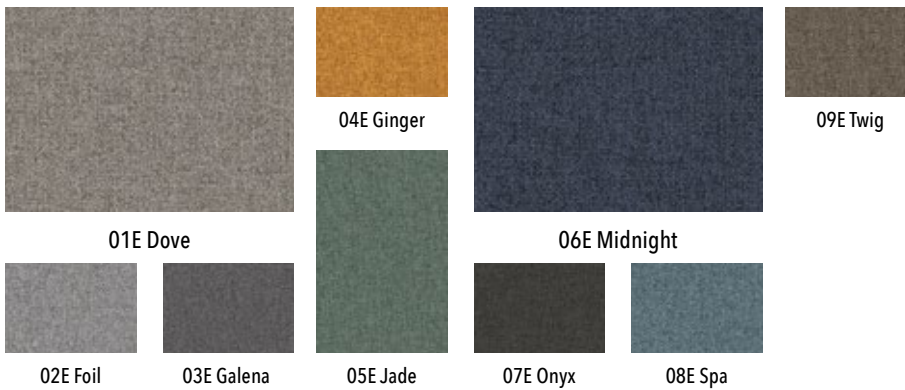

NESTLE





CONTRACT UPHOLSTERY FABRICS

Classic (Vinyl), Glaze (Vinyl)

CLASSIC (VINYL)



C02 Saddle



C03 Black



C30 Marshmallow



C15 Burgundy



C05 Sage



C16 Admiral



C27 Buff



C13 Granite



C19 Taupe




C04 Claret



C26 Papyrus

GLAZE (VINYL)



G10 Amber



G11 Brunette



G23 Warm White



G21 Regatta




G19 Shiraz



G15 Honey



G20 Tannery



G12 Cedar



G16 Licorice



G22 Landscape



G13 Flame



CONTRACT UPHOLSTERY FABRICS

TECHNICAL INFORMATION

Pattern	Content	Weight/Width	Abrasion Colorfastness ASTM 4197 (Double Rubs)	Cold Rack Fed. Std. No. 191A Method 5874/CFFA-6	Ultra Violet Resistance G26-96 Method C/CFFA-2	Mildew Resistance ATM G21-96 CFFA-120	Flame Resistance
Classic	100% Vinyl Backing: 100% Brushed Polyester Knit	29 oz./yd. 54" wide	500,000 Double Rubs	- 20° F	Pass	Pass	Cal. 117 Section E BIFMA Class 1 or A UFAC Class1 • MVSS 302 NFPA - 260 ASTM E84 Class 1 or A Boston BFD 1X-1 Port Authority N.Y./N.J. IMO A.652 (16) 8.2 IMO A.652 (16) 8.3
Glaze	100% Phthalate Free PVC Vinyl Backing: Polyester/Cotton	36 oz./yd. 54" wide	100,000 Double Rubs	- 20° F			Cal. 117 Section E BIFMA Class 1 or A UFAC Class1 MVSS 302 • NFPA - 260 ASTM E84 Class 1 or A IMO A.652 (16) 8.2 IMO A.652 (16) 8.3

Cleaning Method	STAINING AGENT							
	Dirt	Penmarks	Sharpie	Paint	Ketchup Mustard	Lipstick	Nail Polish	Blue Jean
Method 1	X	X						X
Method 2	X	X			X	X		X
Method 3		X	X	X	X	X	X	X

Method One: For most common stains and spills, use mild soap and water

Method Two: If Method One doesn't work, use the following household items; FANTASTIK • 409 • MR. CLEAN

Method Three: For tougher stains as sharpie, paint and lipstick, use a 70% isopropyl alcohol wipe.

Flame Retardancy:

- California 117, Section E
- NFPA 260 - 1989
- UFAC Class 1

Cleaning Instructions: Primary

WS - For water based stains, use mild detergent foam or upholstery shampoo.
For oil based stains, spot clean with a dry cleaning solvent, being sure to test area first. Cleaning by a professional furniture service is recommended.

Additional cleaning information can be found at www.cryptonfabric.com

Crypton® is protected by ten global patents

U.S. PATENTS 6,541,138, 6,251,210, 6,207,250, 6,165,920, 6,024,823,
5,747,392, 5,565,265 and 6,584,491 - OTHER U.S. AND INTERNATIONAL PATENTS PENDING.

© 2010 Crypton, Inc. Crypton and the red planet logo are registered trademark of Crypton, Inc.

Cleaning Instructions: Classic, Glaze

Prompt cleaning is always recommended. Ordinary dirt and stains can be removed with mild soap and water. Rinse the cleaned area with clean water and dry with a lint-free cloth. Classic & Glaze will resist, without serious discoloration, the repeated actions of normal dilutions of non-abrasive chlorine or ammonia-based cleaners.

Resilience^{SR}

ENDURING PROTECTION

Resilience^{SR} represents the latest technology in Faux Leather and Vinyl Protection enhancing performance where it is needed the most.

STAIN RESISTANCE: With proper care, materials treated with Resilience^{SR} can be easily cleaned and will guard against stains maintaining the desired surface appearance for years to come.

ANTI-MICROBIAL & ANTI-BACTERIAL PROTECTION: Products treated with Resilience^{SR} are engineered to inhibit bacterial growth, as well as fungus, mold and mildew spores, resulting in a more hygienic environment.

ABRASION RESISTANCE: Resilience^{SR} provides additional wear properties and surface durability to any Vinyl or Faux Leather, thereby increasing the life of the material.

Resilience^{SR} is not visible, and does not affect the hand of the material. Resilience^{SR} is engineered to last, even after repeated cleaning and wear. Specify Resilience^{SR} for the most demanding healthcare and hospitality applications.



CONTRACT UPHOLSTERY FABRICS

Quattro, Fedora, Cosmopolitan*

QUATTRO




QU5 Midnight Blue



QU9 Spring Green



QU6 Deep Crimson



QU8 Wheat



QU7 Laguna



QU1 Khaki



QU2 Granite



QU4 Honeycomb

FEDORA



01F Bitumen



04F Dew



06F Light Grey



09F Ruby



02F Charcoal



03F Dapper



05F Indigo



07F Opal



08F Pewter

COSMOPOLITAN*



D13 Shadow



D08 Ecru



D10 Granite



D03 Saffron



D06 Opal



D09 Mist


***Limited Quantities Available**



CONTRACT UPHOLSTERY FABRICS

Jive, Variant 10*, Theory 10*


JIVE



01J Aegean



04J Bordeaux




07J Midnight



09J Smoke



02J Alabaster



03J Aubergine




05J Emerald



06J Mango




08J Pewter



10J Stone


VARIANT 10*



05V Carbon

***Limited Quantities Available**

THEORY 10*



04T Charcoal



07T Indigo

***Limited Quantities Available**



Technical Information

Contract Upholstery Fabrics

Pattern	Content & Backing	Certifications	Weight/Linear Yd.	Pattern Repeat	Finish	Abrasion Resistance	Light-Fastness	Flammability	Cleaning Code
JIVE <i>Directional</i>	100% Polyester Backing: Acrylic		12.43 oz./ln yd 57" wide	H - 1.2 in V - 0.4 in	Stain Repellent - PFOA & PFOS Free	82,000 Double Rubs	40 Hours	Passes Cal TB 117-2013; NFPA 260/UFAC Class 1	S
VARIANT 10 <i>Directional</i>	75% Post-Consumer Recycled Polyester/25% Polyester Backing: Latex		14.5 oz./ln yd 54" wide	H - 0.17 in V - 0.2in	Stain Repellent -	140,000 Double Rubs	40 Hours	Passes Cal TB 117-2013; NFPA 260/UFAC Class 1	WS
THEORY 10 <i>Directional</i>	75% Post-Consumer Recycled Polyester/25% Polyester Backing: Latex		14.5 oz./ln yd 54" wide	H - 0.17 in V - 0.39in	Stain Repellent -	150,000 Double Rubs	40 Hours	Passes Cal TB 117-2013; NFPA 260/UFAC Class 1 ASTM E84 Class 1 or A (Unadhered)	WS
QUATTRO <i>Directional</i>	100% Polyester Backing: Acrylic	GREENGUARD GOLD	13.06 oz	Non-Matching	Stain Repellent -	237,000^ Double Rubs	40 Hours	Passes Cal TB 117-2013; NFPA 260/UFAC Class 1; ASTM E84 (Unadhered) IMO A.652 (16) 8.2	S
FEDORA <i>Directional</i>	100% Polyester Backing: Polyester		17.2 oz./ln yd 54" wide		Stain Repellent - PFAS Free	100,000 Double Rubs	40 Hours	Passes Cal TB 117-2013; NFPA 260/UFAC Class 1 ASTM E84 Class 1 or A (Unadhered)	WS
COSMOPOLITAN <i>Directional</i>	88% Polyester, 12% Nylon Backing: Polyester	GREENGUARD GOLD	19.28 oz	None	Crypton®with Antimicrobial Silver Ion Technology	100,000 Double Rubs	40 Hours	Cal 117-2013 NFPA 260/UFAC Class 1	C, BC



REDUCED ENVIRONMENTAL IMPACT

This product is GREENGUARD Gold Certified for low chemical and particle emissions to UL standard UL 2818 and may contribute to LEED certification. For complete information visit UL.com/gg.



Eco-System®

Sustainable. Attainable at Mayer Fabrics.

The Eco-System icon indicates 100% recycled content.

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

Quattro

S: Solvent — Spot clean, using a mild water-free solvent or dry cleaning product. Clean only in a well-ventilated room avoid any product that contains carbon tetrachloride or other toxic materials. Pretest a small area before proceeding. Always rinse promptly with clean water.

Cosmopolitan

C: Crypton Cleaning — Crypton fabrics are available in various fiber types, and all Crypton fabrics can be cleaned with soap and water. For the best cleaning solution, use CRYPTON UPHOLSTERY CLEANER, available from Mayer Fabrics.

BC: Bleach Cleanable — 1 part bleach, 9 parts water =10% bleach, 90% water solution. **Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.**

Prompt cleaning is always recommended.

For detailed care and cleaning information or each pattern, please refer to the MCE website or contact customer service.

ADDITIONAL INFORMATION

Cal TB 133: All patterns may comply with California Technical Bulletin 133 when combined with appropriate components.

^ Abrasion: Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.

Memo Samples: Please keep this card intact. Individual memo samples are available. Please contact MCE or refer to the MCE website.

Color Matching: Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.

Specifications: Specifications are correct at the time of printing. Additional specifications are available on our website.

For information or assistance with products or services, call us at 410.540.5400 or refer to our website, www.mce.md.gov.



These fabrics meet or exceed these ACT performance guidelines *Certification Markedown by ACT*

Quattro



Water and Stain Repellent Finish

Cosmopolitan



CRYPTON®

Formulated with Crypton 2.0 for better performance, bio-based content and a softer, more pliable hand.

Quattro




This 100% polyester fabric is included in the Underwriter's Laboratory Fall Recognition Program. Additional testing of this U.L. recognized component not required on approved panels from participating manufacturers.




CONTRACT UPHOLSTERY FABRICS

Palomino (Vinyl), Jackpot (Vinyl)

JACKPOT (VINYL)

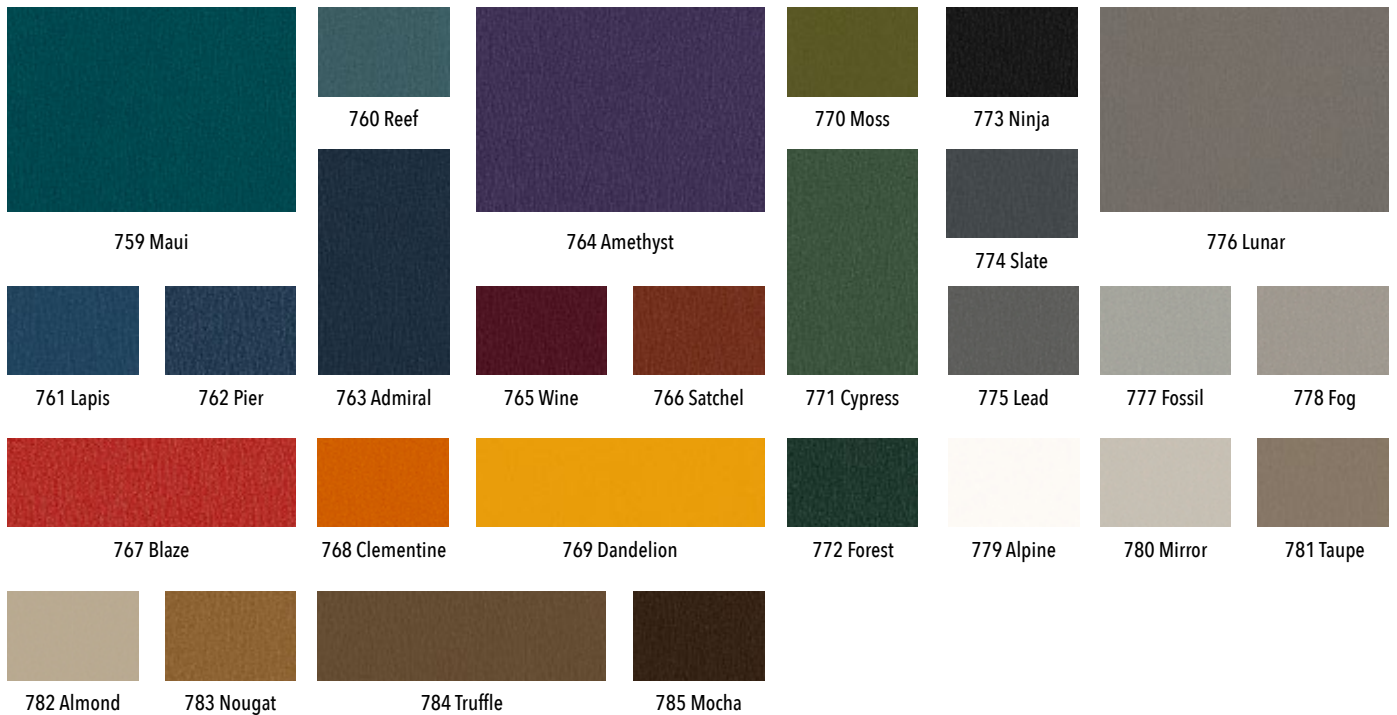

PALOMINO (VINYL)

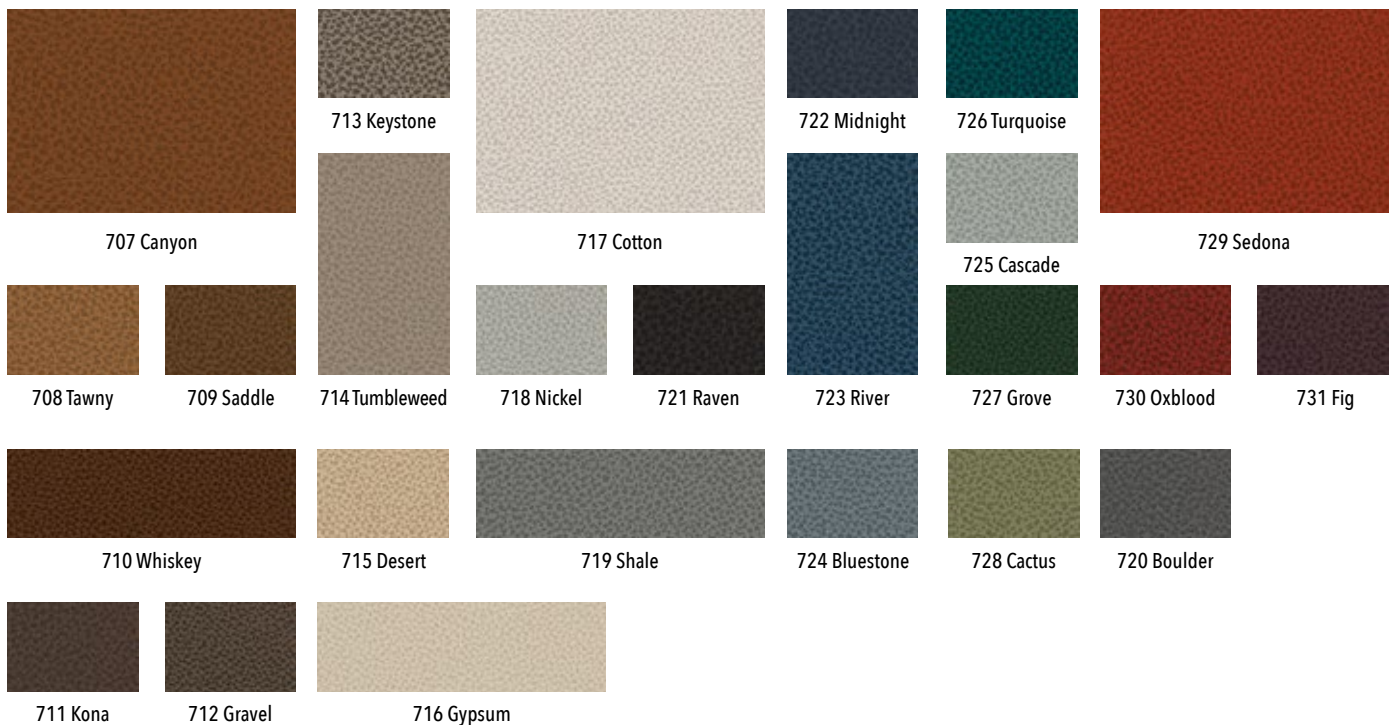



Technical Information

Contract Upholstery Fabrics

JACKPOT

Fabric Specifications

Face	100% Vinyl
Backing	100% Polyester
Bleach Cleanable	Yes Ratio: 90% Water / 10% Bleach Solution
Weight	30.0 oz. per linear yd
Thickness	0.80 mm
Width	54"
Roll Size	30 yards
Directional	No
Railroaded	No
Country of Origin	India

Additional Attributes

PFAS Free	Yes
Prop 65 Compliant	Yes
16P Phthalate Free	Yes
Free of Added FR Chemicals / CAL AB2998 Compliant	Yes
Antibacterial	Yes
Antimicrobial	Yes
BPA Free	Yes
Free of Conflict Minerals	Yes
Formaldehyde Free	Yes
Free of Heavy Metals	Yes
Lead Free	Yes
Sulfide Stain Resistant	Yes
TRIS Free	Yes

Performance Characteristics

Abrasion Resistance ASTM D4157	100,000 double rubs*
Tensile Strength ASTM D751	Warp: 79.1 lbs. Fill: 70.5 lbs.
Tear Strength ASTM D2261-07	Warp: 4.2 lbs. Fill: 8.3 lbs.
Seam Slippage ASTM D751-06	Warp: 46.3 lbs. Fill: 32.6 lbs.
Colorfastness to Crocking AATCC 8	Dry: 4.5 Wet: 5.0
UV Resistance AATCC 16-3	200 hours
Adhesion	Warp: 6.9 lbs. Fill: 5.0 lbs.
Cold Crack CFFA-6	-10° F
Flex ASTM D2097	25,000 cycles
Flammability**	
CAL TB 117-2013	Passes
NFPA 260	Class 1

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

PALOMINO

Fabric Specifications

Face	100% Vinyl
Backing	100% Polyester
Finish/Treatment	Resilience™
Bleach Cleanable	Yes Ratio: 90% Water / 10% Bleach Solution
Weight	32.0 oz. per linear yd
Thickness	1.30 mm
Width	54"
Roll Size	30 yards
Directional	Yes
Railroaded	No
Country of Origin	Turkey

Additional Attributes

PFAS Free	Yes
CFFA-HC-201 Compliant	Yes
Prop 65 Compliant	Yes
16P Phthalate Free	Yes
Free of Added FR Chemicals / CAL AB2998 Compliant	Yes
Antibacterial	Yes
Antimicrobial	Yes
BPA Free	Yes
Free of Conflict Minerals	Yes
Formaldehyde Free	Yes
Free of Heavy Metals	Yes
Lead Free	Yes
Sulfide Stain Resistant	Yes
TRIS Free	Yes

Performance Characteristics

Abrasion Resistance ASTM D4157	250,000 double rubs*
Tensile Strength ASTM D751-06	Warp: 175.0 lbs. Fill: 163.0 lbs.
Tear Strength ASTM D2261	Warp: 11.2 lbs. Fill: 18.9 lbs.
Seam Slippage ASTM D751	Warp: 60.7 lbs. Fill: 79.1 lbs.
Colorfastness to Crocking AATCC 8	Dry: 5.0 Wet: 5.0
UV Resistance AATCC 16	300 hours
Adhesion ASTM D751-06	Warp: 7.4 lbs. Fill: 6.1 lbs.
Cold Crack CFFA-6	-20° F
Flex ASTM D2097	25,000 cycles
Flammability**	
CAL TB 117-2013	Passes
NFPA 260	Class 1

Meets or exceed all ACT® Standards
High Performance Vinyl
Bleach Cleanable
FR Free – Compliant with CAL AB 2998
PFAS Free
CFFA-HC-201 Compliant



* ACT® Registered Certification Marks

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.